


1

3

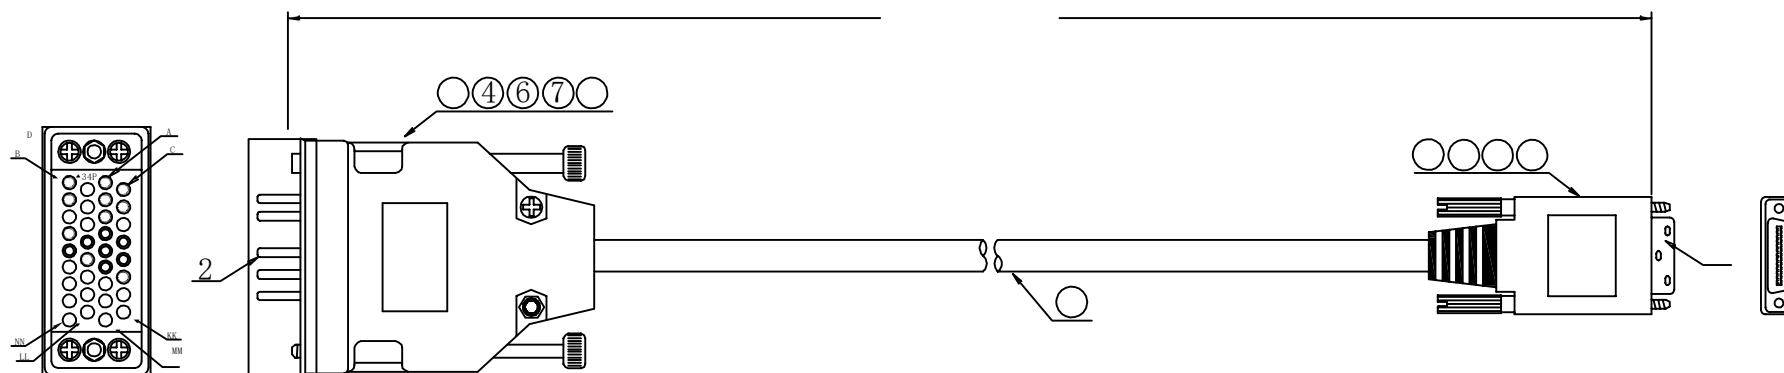

CONN2:V. 35F

- A.电压:DC 300V
 B.绝缘阻抗: $\geq 5M\Omega$
 C.导通组框: $\leq 5\Omega$

PART No.	DESCRIPTION		
01-0708010132	线材--UL 2919 30AWG*18C+1+AL OD:5.8 天蓝色 (DE-1003) L=3000mm		
02-0900828126	插头--V.35M 黑胶芯		
02-0900828102	天蓝色快速装配件壳 插头--		
05-0145602215	V.26M 白胶芯 插头镀镍		
05-0145602112	螺丝--4.5*60.2公母螺丝		
05-0145602114	25P天蓝色成型 (DE-1003) 螺丝--		
05-0145602123	5*50.5光身螺丝棒		
12-0910828114	螺丝--PM3*18(2pcs) PA2.6*10(4pcs) 镀镍		
03-0204018021	英制 螺丝--M3螺帽 镀镍 英制		
03-0103010102	马口铁--马口铁(内外) 胆		
13-14111013	胶料--PE料 (DE-1018)内模料 RoHS		
15-07110021	外模--PVC料45P (DE-1003)		
17-01005011	天蓝色		

1

扎带--L=120 白色

		MM				
		.030				
		.010				
		.005				
		SCALE	NONE		REV	A
DRAWN BY	TOMY CHANG	UNIT	MM		CUSTOMER:	
		SHEET	1/1	DWG No.:VID1056		
CHECK BY		DATE	16/07/10	TITLE:CAB-SS-V35MT		
CUSTOMER P/N:		P/N:DY-S138(1)				

7

8

9

A

胶袋--0.08*9*12" PE袋 单条包装
 纸箱--L460*W300*H300MM 46*30*30
 RoHS

4

5

6

7

8

9

F

2

3

4

3000 ± 30

F

2

8

E



3 5 10 11

13 26

2

1 14

E

1

CONN1:V. 26P

电子测试条件

PINOUT:

D

CONN1	CONN2	CONN1	CONN2
B-----	19+22+23 +24+26	S-----	14
C-----	8	T-----	18
D-----	11	U-----	2
E-----	12	V-----	4
F-----	6	W-----	15
H-----	7	X-----	17
K-----	13	Y-----	3
P-----	1	AA-----	16
R-----	5	A+GND-----	GND

D

C

C

No.

Q'TY UNIT

B

模号 DY-1018
DY-1017

B

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10
- 11
- 12
- 13

- 1 pcs
- 1 set
- 1 pcs
- 各1 pcs
- 2 pcs
- 6 pcs
- 2 pcs
- 1 set
- 5 G
- 20 G
- 1 pcs
- 1 pcs
- 箱

A REV	TOLERANCE INCHES	INITIAL RELEASE DESCRIPTION OF CHANGE	16/07/10 DATE
.X	.015		
.XX	.010		
.XXX	.005		