




1	2	3	4	5	6	7	8	9	10	
CUSTOMER NAME						DATE	REV	DESCRIPTION		BY
CUSTOMER Part No.						2019.02.20	A/0	NEW		XHX




P1



P2

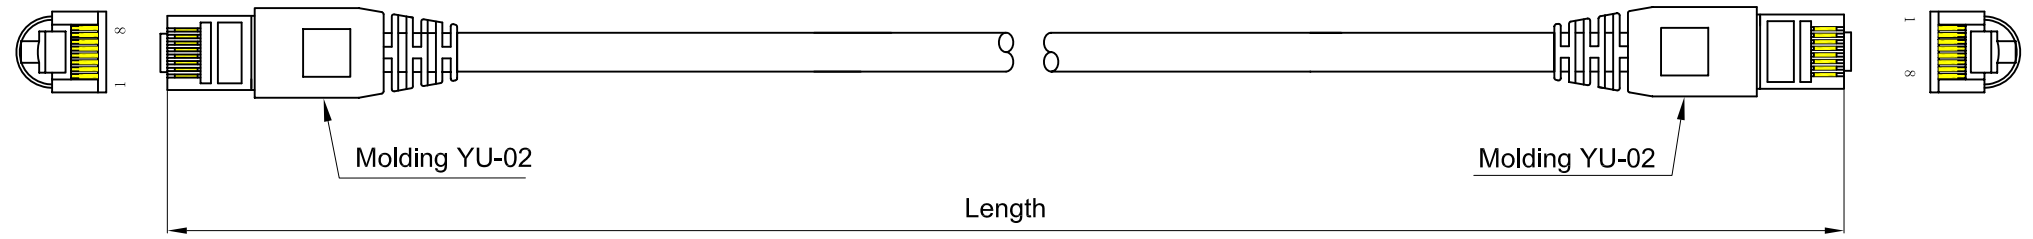

Marking: CAT.6 U/UTP INSTALLATION OUTDOOR CABLE 23AWGX4P CONFORMS TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2

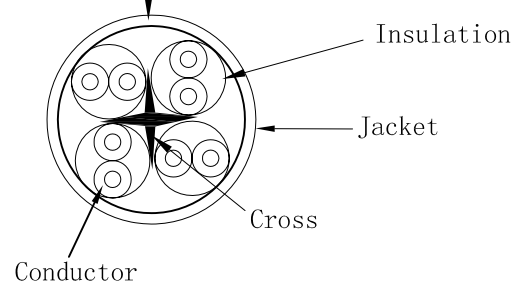

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

Conductor		Bare Copper 23AWG
Insulation		Thickness:MIN at any point:0.20mm MAX AVG:0.24mm Diameter:1.03±0.06mm
Jacket	LDPE	Thickness:MIN at any point:0.46mm MAX AVG:0.55mm Diameter:6.1±0.1mm
Wire	CAT.6 UTP (With Corss) SLD 23AWG*4P	
Plug	Gold flush YU-02	
Color	BK	
Length	2000 +15mm -20mm	

NOTE:
1.ELECTRICAL TEST:
<1> 100% OPEN SHORT & MISS WIRE TEST.

Prat.No			
Description	CAT.6 UTP (With Corss) SLD 23AWG*4P LDPE		
UNIT	mm	APPROVAL	CHECKER
PAGE	1/1	鐘曙光	XHX
Draw.No			